AT-60X-S
XLR Series Variable Lights
Data Sheet

AXTON
ILLUMINATE THE NIGHT

AT-60X-S Variable Light

- Up to three digitally controlled illumination angles within the same unit; select from 10°, 30°, 60° & 130°
- Available in IR, White Light or Hybrid (IR+White Light)
- I/O Ports for camera synchronization and light management
- IP Network Controller-ready for full control via browser or VMS
- Built-in Day/Night switch
- Digital intesity control
- Low Voltage

Made in the USA

- All illuminators designed and built in Salt Lake City, UT, USA

Lifetime Warranty with Advanced Replacement

- We value your trust, that's why all products are covered by a lifetime warranty with advanced replacement

TECHNICAL SPECIFICATIONS

Wavelength:	850nm (semi-covert)
Input Voltage:	24V AC / DC
Power Consumption:	60 W
Operating Temperature:	-40°F...+140°F/-40°C...+60°C
Dimensions:	5" x 7" x 2.5"/127 x 178 x 64 mm
Weight	3 lb./1.4 kg.
Environmental	IP 67

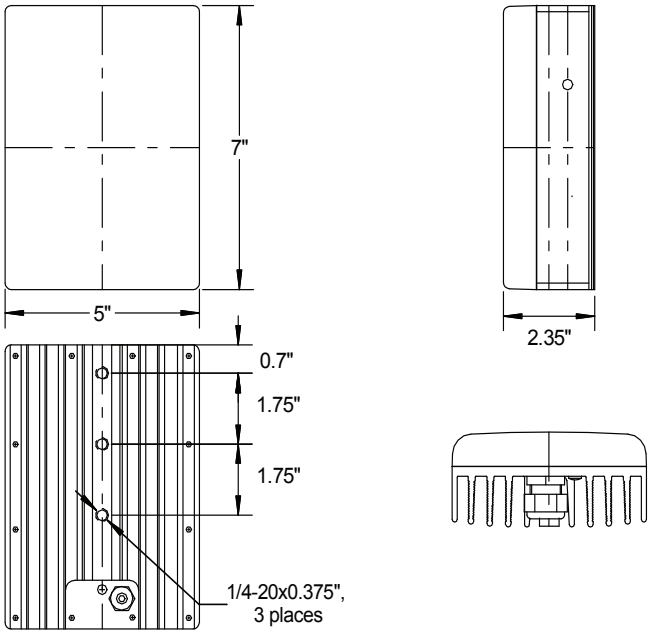

ILLUMINATION DISTANCE

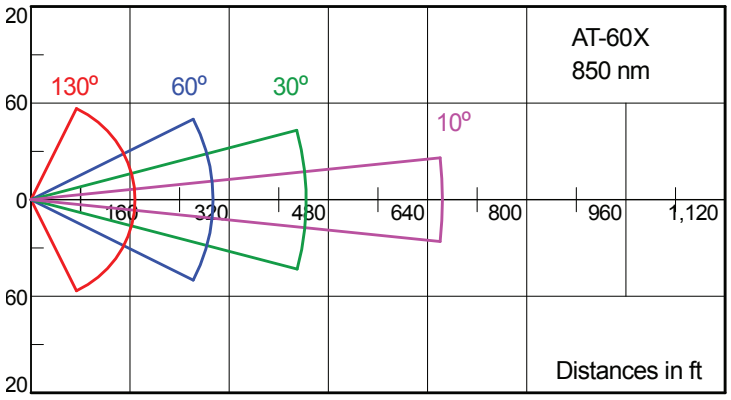

ANGLE	RANGE	HFOV
10°	665'/200m	138'/42m
30°	445'/135m	230'/70m
60°	295'/89m	265'/80m
130°	168'/50m	302'/91m

AXTON 801 W. Robinson Dr., Suite #500, North Salt Lake, UT 84054 T +1-801-519-0500 F +1-801-519-0501 www.axtontech.com sales@axtontech.com